


AQUAPURE
Water Purification System



Create a
Saltwater Oasis



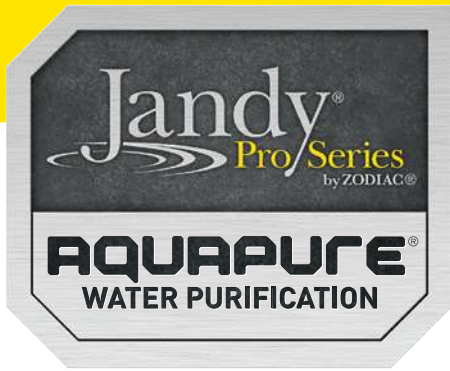

THE HEAVY-DUTY STANDARD FOR MAXIMUM PERFORMANCE

AquaPure salt-water chlorine sanitizing systems use salt-water to deliver high-performance water sanitation with uncompromised performance, reliability, and hydraulic efficiency.

» Robust Features


- Automatic self-cleaning feature, which ensures consistent operation and extends the life of the cell.
- Professional-grade, ruthenium coated titanium electrodes for long-term reliability.
- Exclusive Tri-Sensor technology — reliable electronic water flow detection to ensure maximum performance, even at very low flow rates (to take advantage of the benefits of VS pumps).
- Digital salinity read-out for accurate salt level indication
- Flow, temperature, and status readings provide instant feedback on the current operation.

» Easy Integration

- Seamless communication with AquaLink® Control systems, enabling easy monitoring of salt levels and convenient, precise sanitizer output settings.
- When combined with PureLink™ power centers, AquaLink and AquaPure work together for the ultimate in pool sanitizing and remote operation convenience.

Zodiac Pool Systems, Inc.
2620 Commerce Way, Vista, CA 92081
1.800.822.7933 | www.ZodiacPoolSystems.com

Zodiac Pool Systems Canada, Inc.
2115 South Service Road West, Unit #3, Oakville, ON L6L 5W2
1.888.647.4004 | www.ZodiacPoolSystems.ca

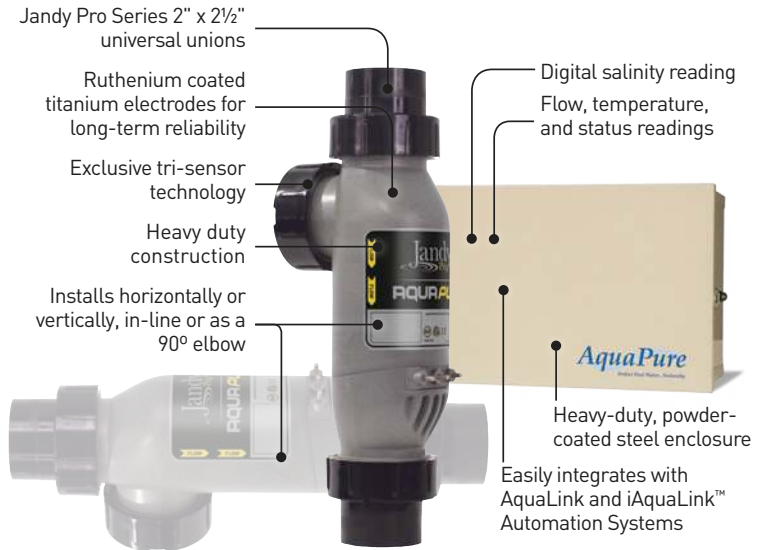

SPECIFICATIONS

Model	PLC700	PLC1400
Pool Size*	Up to 12,000 Gallons	Up to 40,000 Gallons
Input	120 VAC, 50/60 Hz, 1.5 AMPS 240 VAC, 50/60 Hz, 0.75 AMPS	120 VAC, 50/60 Hz, 2.5 AMPS 240 VAC, 50/60 Hz, 1.25 AMPS
Output	22-30 VDC @ 3 AMPS maximum	22-30 VDC @ 6 AMPS maximum
Chlorine	0.625 lb./24 Hr. (283 gm/24 Hr.)	1.25 lb./24 Hr. (567 gm/24 Hr.)
Recommended Flow Rate	20-120 GPM	20-120 GPM

*Pool sizes are generalizations and may vary with environmental conditions. Pools with greater exposure to sunlight may require greater chlorine production capacity.

HEAD LOSS CHART

